


CONTROLLED ENVIRONMENT SYSTEMS FOR THE HOBBY GREENHOUSE

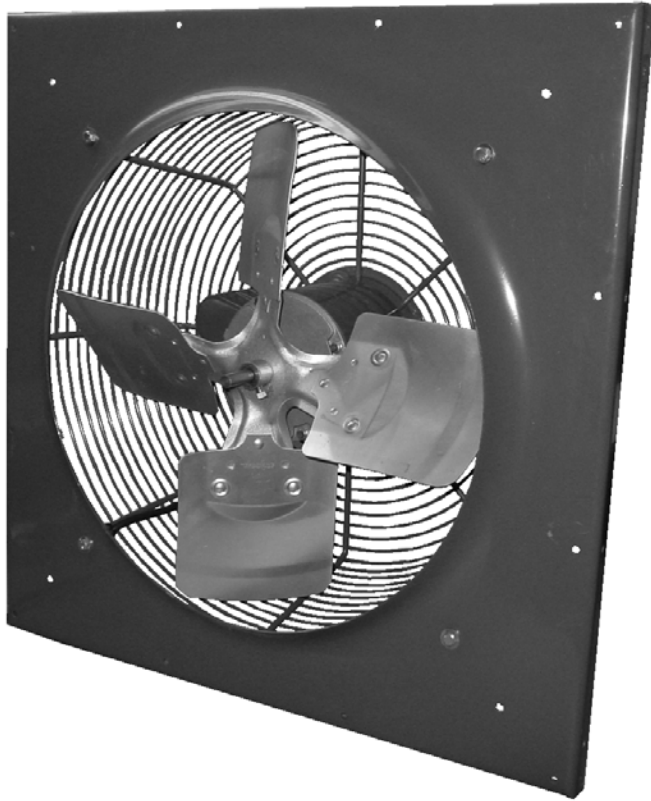

TYPE **CDP/WS** Fans

FARM PRODUCTS DIVISION

MEMBER OF AMCA
AMERICAN COOLAIR CORPORATION
P.O. BOX 2300
JACKSONVILLE, FLORIDA 32203
PHONE (904) 389-3646 FAX (904) 387-3449
E-MAIL – agfans@coolair.com
WEBSITE – www.coolair.com






Economical, Practical, Effective

CDP/WS fans are engineered for minimal maintenance and efficient, economical operation. Designed to exhaust relatively low volumes of air from smaller buildings, these fans are well suited for the hobby greenhouse. The CDP/WS is shipped with the fan already mounted in a galvanized steel wall sleeve for quick and easy installation. Combined with the optional aluminum Type SU shutter and optional mounting flanges, the CDP/WS is a complete hobby greenhouse fan package.

Basic Components

Each CDP/WS fan features an aluminum propeller which mounts directly to the motor shaft. There are no bearings or belts that require maintenance. Motors are permanently lubricated and totally enclosed. A welded steel wire inlet guard and a galvanized steel wall sleeve are standard on all models. An optional speed controller accessory allows the motor speed to be varied to achieve performances from 50% to 100% of catalog ratings.

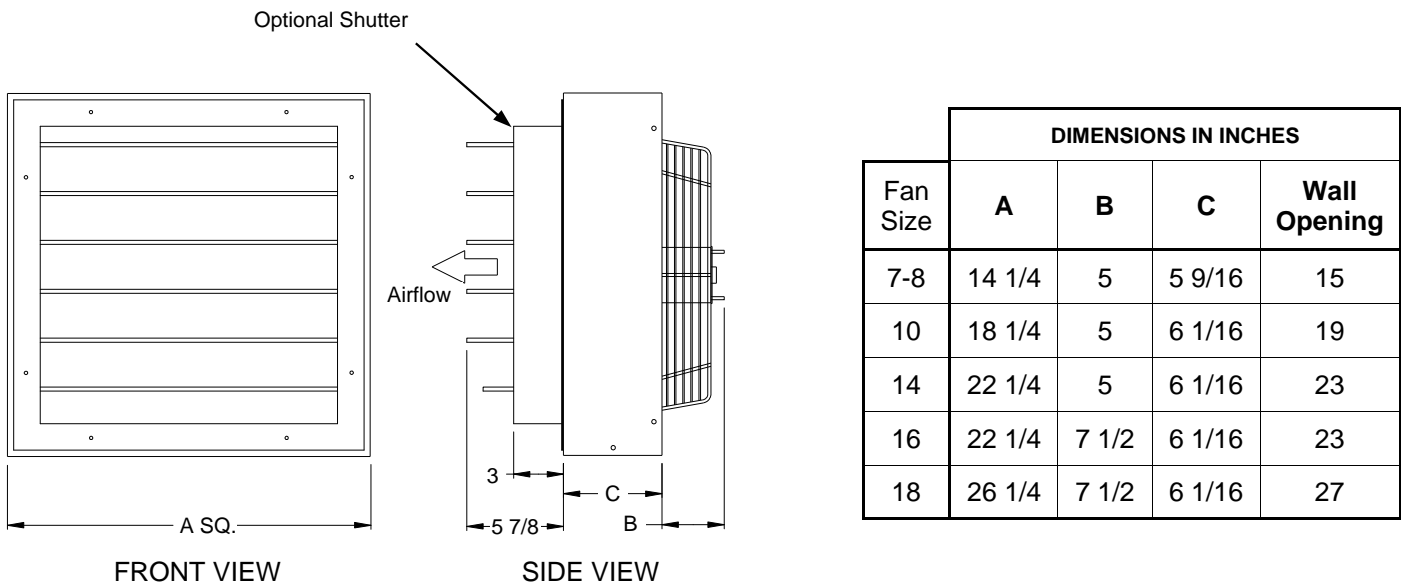

PERFORMANCE RATINGS

AMERICAN COOLAIR CORPORATION certifies that the performance data for the CDP/WS wall fan models shown below are based on tests conducted in an accredited laboratory in accordance with ANSI/AMCA Standard 210-07.

Fan Model	Fan Size	Motor HP	Fan RPM	CFM at Static Pressure			Approx. Ship Wt.	Shutter Model
				0"	.10"	.125"		
CDP/WS7B17	7	1/20	1725	333	263	—	16	SU7-8
CDP/WS8B17	8	1/20	1675	530	458	450	16	SU7-8
CDP/WS10B15	10	1/20	1560	793	706	687	24	SU10-12
CDP/WS14B15	14	1/20	1450	1,144	1,028	1,001	28	SU14-16
CDP/WS16G11	16	1/4	1140	2,388	2,243	2,198	39	SU14-16
CDP/WS18G10	18	1/4	1060	3,281	2,932	2,842	46	SU18-20