


Type DHMH

Discharge Hood



P.O. Box 2300 Jacksonville, Florida 32203
 Phone: (904) 389-3646
 Fax: (904) 387-3449 • (904) 381-7560
 E-mail: fans@coolair.com
 Internet: www.coolair.com

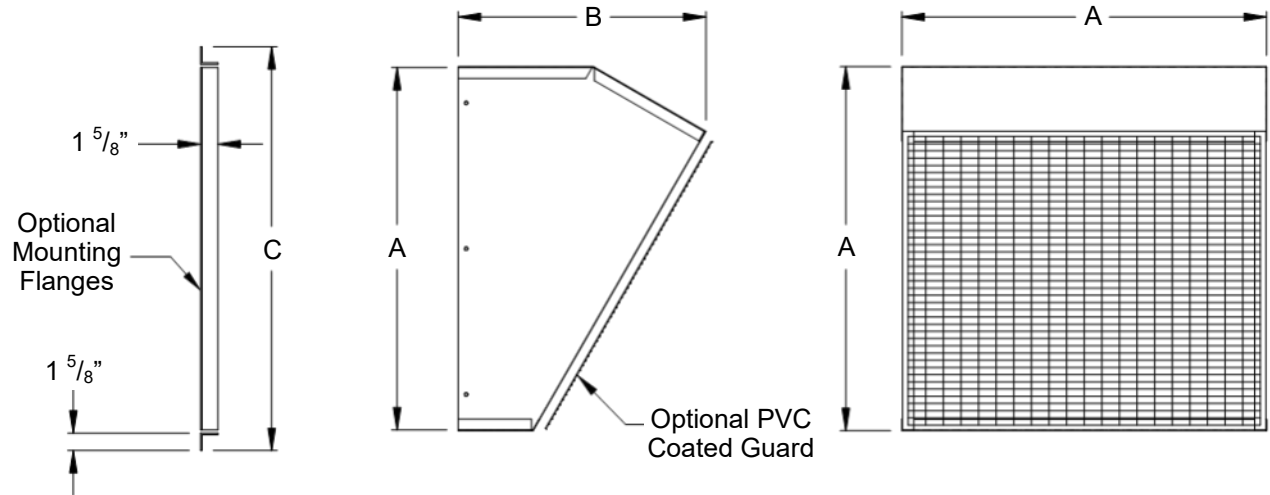

Standard Features

- For use with American Coolair wall fans and Type MH wall housings
- Angled design directs the exhaust airstream and prevents the entry of rain into the building
- Heavy gauge galvanized steel
- Shipped knocked down
- Designed to be mounted directly to Type MH housings, or to the wall with optional flanges

Abbreviations for Accessories

(List on fan submittal sheet.)

DHMHG – Hood outlet guard
 MFMH – Wall mounting flanges
 EPX – 6 mil epoxy finish

Model	Dimensions in Inches			Metal Gauge
	A	B	C	
DHMH7-8	14 ½	13	17 ¾	22
DHMH10-12	18 ½	15	21 ¾	22
DHMH14-16	22 ½	17	25 ¾	22
DHMH18-20	26 ½	18 ¾	29 ¾	22
DHMH24	32 ½	22	35 ¾	20
DHMH30	38 ½	24 ¾	41 ¾	20
DHMH36	44 ½	27 ¾	47 ¾	18
DHMH42	50 ½	30 ¼	53 ¾	18
DHMH48	56 ½	32 ¾	59 ½	18
DHMH54	62 ½	35 ¾	65 ¾	18
DHMH60	68 ½	35 ¾	71 ¾	18
DHMH72	80 ½	41 ¾	83 ¾	18
DHMH84	92 ½	41 ¾	95 ¾	18