Type CUDA

Direct Drive Centrifugal Upblast Power Roof Ventilators

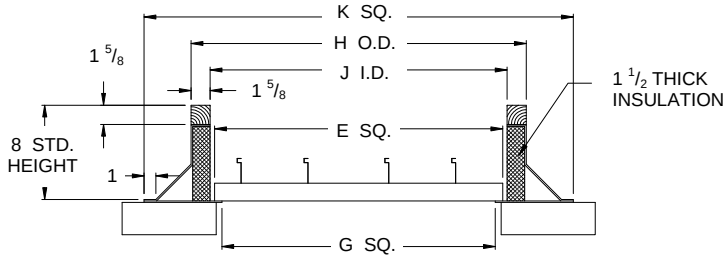

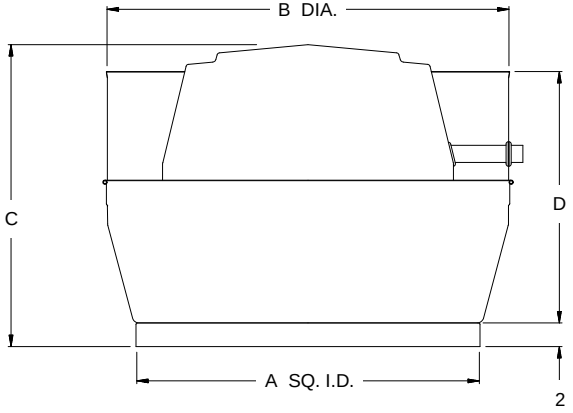

AMERICAN COOLAIR CORPORATION

P.O. Box 2300 Jacksonville, Florida 32203
Phone: (904) 389-3646
Fax: (904) 387-3449 • (904) 381-7560
E-mail: fans@coolair.com
Internet: www.coolair.com

Standard Fan Features

- Non-overloading aluminum wheel computer balanced.
- Force ventilated motor compartment isolated from airstream.
- Vibration isolators on drive frame.
- Weatherproof spun aluminum housing.
- NEMA Standard frame size motors.
- Overlapping wheel/inlet venturi.
- AMCA label for air and sound.
- Safety disconnect device.

Optional Features

- UL Label for Standard 705.
- Backdraft damper.
- Roof curb (damper shelf optional).
- Epoxy coating.
- Birdguard.

Unit	Ventilator Dimensions				Roof Curb and Damper Dimensions				
	A	B	C	D	E	G	H	J	K
06, 08, 10	18	23	14 1/8	11 1/8	12 3/4	11 1/4	16 1/2	13 1/4	24 1/2
12E10, 12J16, 13F11, 13J15, 15H10, 15K15	26	29 1/4	19	22	20 3/4	19 1/4	24 1/2	21 1/4	32 1/2
12J17, 13K17, 15L17	26	29 1/4	24 1/4	22	20 3/4	19 1/4	24 1/2	21 1/4	36 1/2
16, 18, 20	30	35 1/4	26 3/8	22	24 3/4	23 1/4	25 1/4	25 1/4	24 1/2

Dimensions in inches

☐ Check here for UL 705.

Specifications

		FAN DATA					MOTOR DATA						
FAN NO.	QTY.	MODEL NO.	CFM	SP	RPM	SONES	HP	RPM	VOLTAGE	PH	HZ	ENCLOSURE	ACCESSORIES AND REMARKS

PROJECT _____ ENGINEER _____ SUBMITTED BY _____ DATE _____

LOCATION _____ CONTRACTOR _____ APPROVED BY _____ DATE _____

Form No. 715-31-3 (5-01) Printed in U.S.A. © 2001 by American Coolair Corporation