

Type CWDA

Direct Drive Centrifugal Wall Exhaust Fans



AMERICAN COOLAIR CORPORATION

P.O. Box 2300 Jacksonville, Florida 32203
 Phone: (904) 389-3646
 Fax: (904) 387-3449
 E-mail: fans@coolair.com
 Internet: www.coolair.com

Standard Fan Features


- Non-overloading aluminum wheel computer balanced.
- Force ventilated motor compartment isolated from airstream.
- Vibration isolators on drive frame.
- Weatherproof spun aluminum housing.
- NEMA Standard frame size motors.
- Overlapping wheel/inlet venturi.
- AMCA label for air and sound.
- Galvanized mesh birdscreen.
- Safety disconnect device.

Optional Features

- UL Label for Standard 705.
- Backdraft damper.
- Wall mounting flange.
- Epoxy coating.

Check here for UL 705.

Sheet _____ of _____

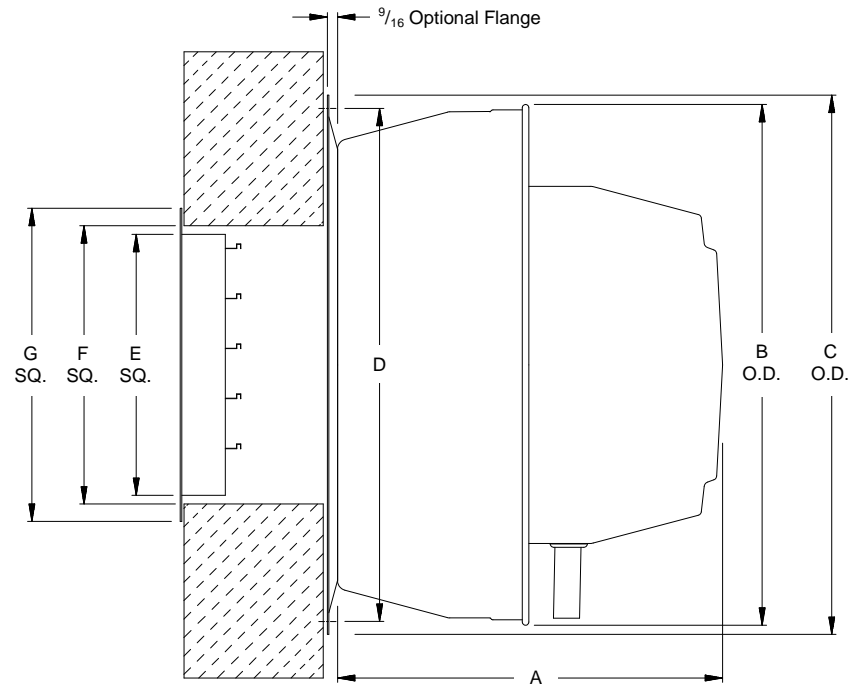

Unit	Ventilator Dimensions				Damper Dimensions		
	A	B	C	D	E	F	G
06, 08, 10	12 1/8	23 3/4	25 1/4	24 1/8	10 1/4	10 3/4	12 1/2
12E10, 12J16, 13F11, 13J15, 15H11 & 15K15	17 1/4	29 7/8	31	29 1/2	15 1/4	15 3/4	17 1/2
12J17, 13K17 & 15L17	22 1/8	29 7/8	31	29 1/2	15 1/4	15 3/4	17 1/2
16, 18, 20	24 3/8	35 7/8	36	34 1/2	22 1/4	22 3/4	24 1/2

Dimensions in inches

Specifications

FAN DATA							MOTOR DATA						ACCESSORIES AND REMARKS
FAN NO.	QTY.	MODEL NO.	CFM	SP	RPM	SONES	HP	RPM	VOLTAGE	PH	HZ	ENCLOSURE	

PROJECT _____ ENGINEER _____ SUBMITTED BY _____ DATE _____
 LOCATION _____ CONTRACTOR _____ APPROVED BY _____ DATE _____