

# Type MXF with PRVK

Belt Drive, Mixed Flow PRV



P.O. Box 2300 Jacksonville, Florida 32203  
 Phone: (904) 389-3646  
 Fax: (904) 387-3449 • (904) 381-7560  
 E-mail: fans@coolair.com  
 Internet: www.coolair.com

## Standard Fan Features

- Operates reliably in hostile environments
- Motor isolated from airstream
- Motor Cover
- Heavy gauge steel plate construction
- Steel mixed flow wheel with line bore hub
- Heavy duty flange mount ball bearings
- External re-lubrication fan bearing fittings
- Variable pitch pulleys (most models)

## Abbreviations for Accessories


- IG/OG – Inlet or Outlet Guard  
 DC – Duct Connector  
 BT – Belt Tube  
 EPX – 6 Mil Epoxy Finish  
 AP – Access Panel

Size	A	B	C*	D	E	F	G	H	J
21	32	58 1/4	38	27 15/16	25 7/8	27 5/8	30 5/8	12	33
27	38	69 1/8	44	34 3/16	32 1/8	32 1/2	36 5/8	16	37
32	44	73 5/8	50	40 1/2	38 1/8	32 1/2	41 1/8	16	42 1/4
38	50	83 3/8	56	46 3/4	44 3/16	37 3/8	46	24	46 1/8
43	56	89 1/2	62	53	50 1/2	37 3/8	52 1/8	24	49 3/4

\* - Recommended curb O.D. is 'C' - 2"

Dimensions in inches

Sheet \_\_\_\_\_ of \_\_\_\_\_

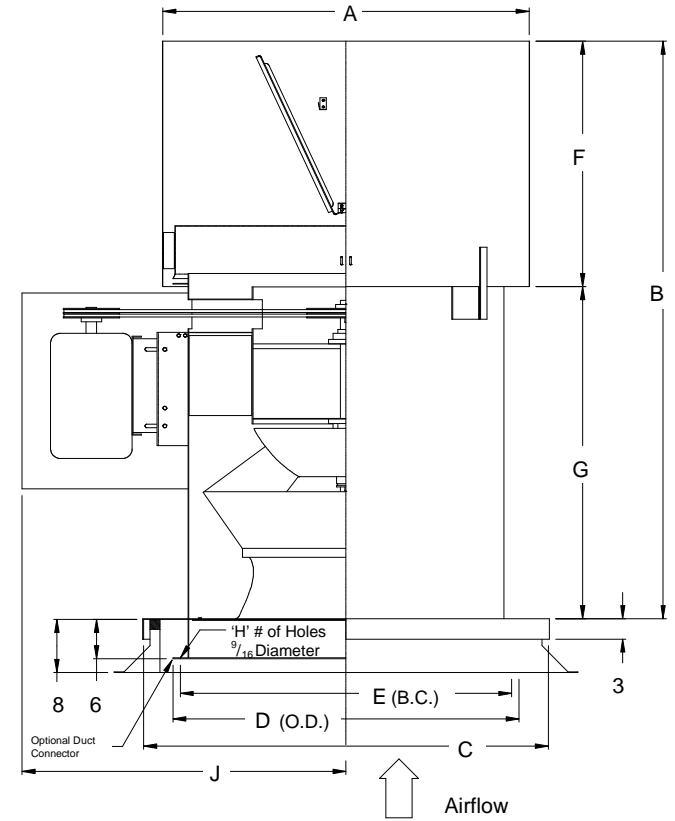

## Specifications

FAN NO.	QTY.	FAN DATA					MOTOR DATA					ENCLOSURE	ACCESSORIES AND REMARKS
		MODEL NO.	CFM	SP	RPM	SONES	HP	RPM	VOLTAGE	PH	HZ		

PROJECT \_\_\_\_\_ ENGINEER \_\_\_\_\_ SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

LOCATION \_\_\_\_\_ CONTRACTOR \_\_\_\_\_ APPROVED BY \_\_\_\_\_ DATE \_\_\_\_\_