Type SAED

Spun Axial Exhaust Power Roof Ventilators

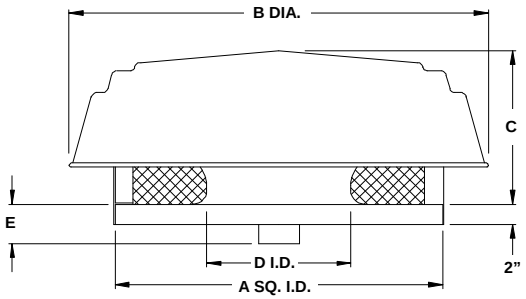

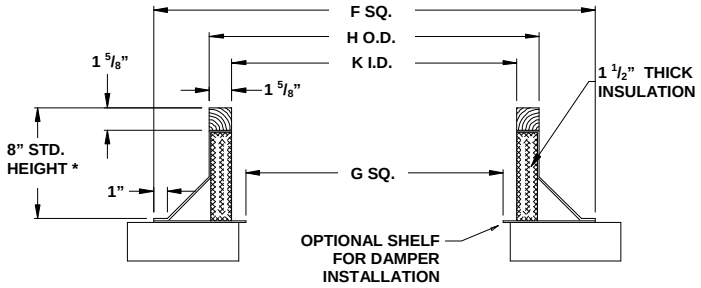

* A HIGHER-THAN-STANDARD CURB MAY BE REQUIRED FOR CLEARANCE BETWEEN FAN MOTOR AND DAMPER WHEN A BACKDRAFT DAMPER IS USED.

AMERICAN COOLAIR CORPORATION

P.O. Box 2300 Jacksonville, Florida 32203
Phone: (904) 389-3646
Fax: (904) 387-3449 • (904) 381-7560
E-mail: info@coolair.com
Website: www.coolair.com

Standard Features

- Low-silhouette design
- Round spun aluminum hood
- Heavy gauge hood supports
- Galvanized wire bird screen

Optional Features

- Backdraft damper (motorized or automatic)
- Roof curb (damper shelf optional)
- Epoxy coating
- Insect screen

Unit Size	Ventilator Dimensions					Roof Curb Dimensions			
	A	B	C	D	E	F	G	H	K
12	18	20 7/8	13	12	4 1/4	24 1/2	11 1/4	16 1/2	13 1/4
16	23	28 5/8	12 3/8	16	6 1/4	29 1/2	16 1/4	21 1/2	18 1/4
20	30	39 5/8	15 3/8	20	6 1/2	36 1/2	23 1/4	28 1/2	25 1/4
25	34	43 5/8	16 3/4	25	9	40 1/2	27 1/4	32 1/2	29 1/4
31	40	48 5/8	18 1/8	31	9	46 1/2	33 1/4	38 1/2	35 1/4
37	46	62 7/8	22 1/8	37	9	52 1/2	39 1/4	44 1/2	41 1/4

Dimensions in Inches

Specifications

		FAN DATA					MOTOR DATA						
FAN NO.	QTY.	MODEL NO.	CFM	SP	RPM	SONES	HP	RPM	VOLTAGE	PH	HZ	ENCLOSURE	ACCESSORIES AND REMARKS

PROJECT _____ ENGINEER _____ SUBMITTED BY _____ DATE _____

LOCATION _____ CONTRACTOR _____ APPROVED BY _____ DATE _____

Form No. 760-31-2 (10-09) Printed in U.S.A. © American Coolair Corporation 2009